




WHAT'S IN THE BOX

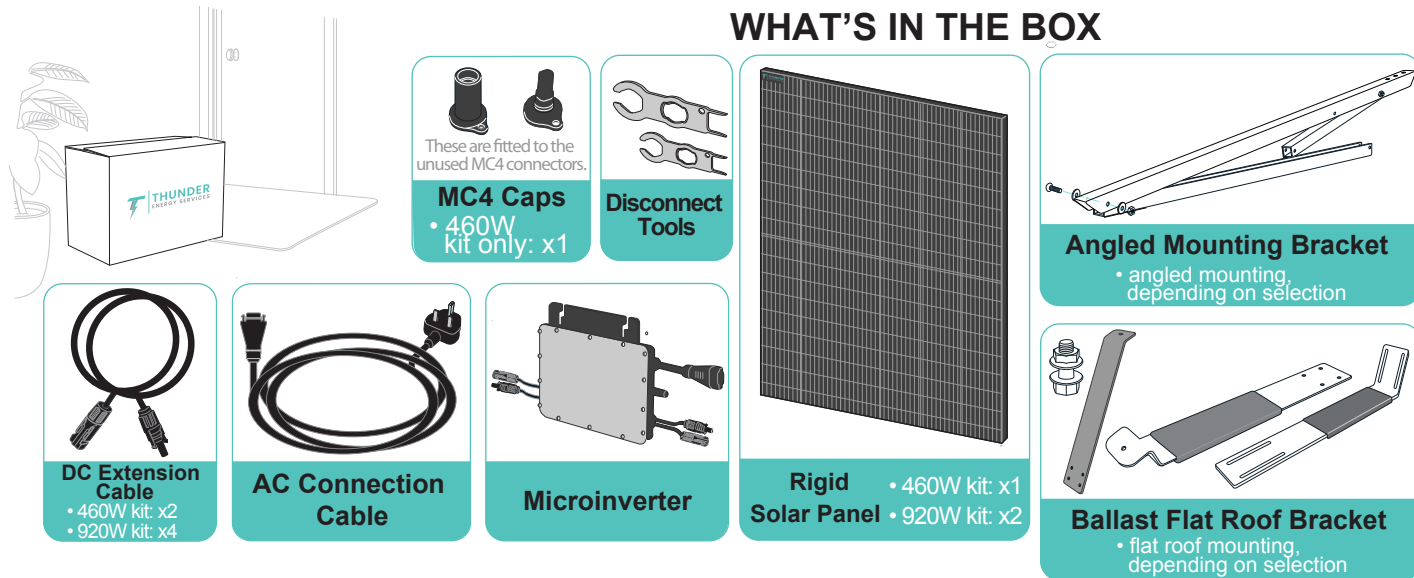

SOLAR PANEL CONNECTIONS

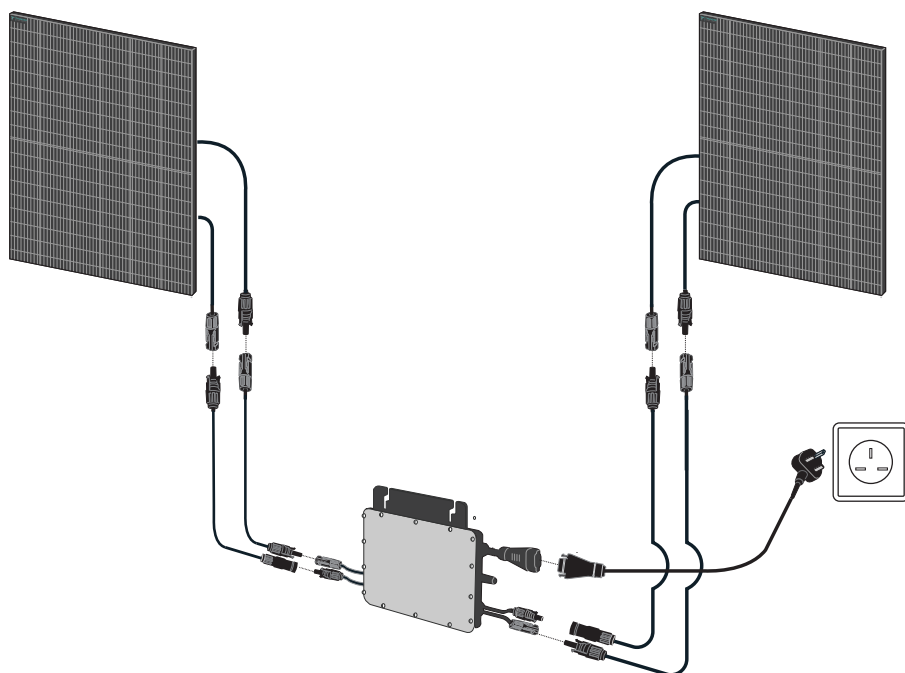

Optional Upgrade to Bolt Plus



If you add the optional battery to your kit, the microinverter connects to the battery, and a second AC cable from the battery connects to your home via a fused spur. For more information, see our Thunder Bolt Plus solar kits with battery.



MONITOR YOUR SYSTEM

STEP ① Download the S-Miles Home App
• Android: Search Google Play for S-Miles Home.
• iPhone: Search App Store for S-Miles Home.


STEP ② Open the S-Miles Home and tap register.

STEP ③ Tap System > Add System

STEP ④ Add your devices: Tap the microinverter icon and enter the PIN code (default: 123456)


STEP ⑤ Select your router's Wi-Fi and enter the password.

STEP ⑥ Fill out the registration form with the required information. Then tap Confirm.

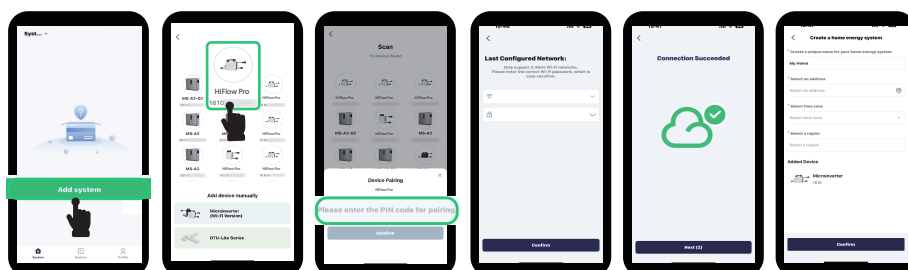


INSTALLATION - ANGLED MOUNTING BRACKET




STEP ① Connect parts with Bolts

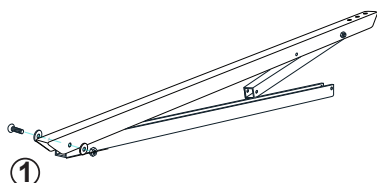

STEP ② Loosen Bolts, adjust to desired angle and tighten bolts.

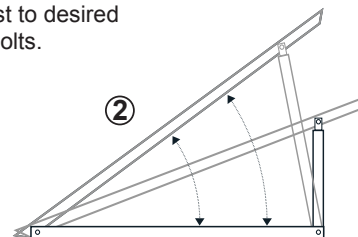


STEP ③ Connect Panel to Bracket for Ground, Railing or Wall Mounting.
Wall mounting requires 4 × M8×70 expansion bolts (not included).

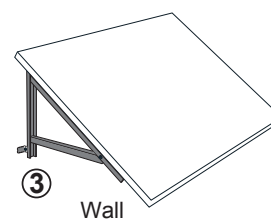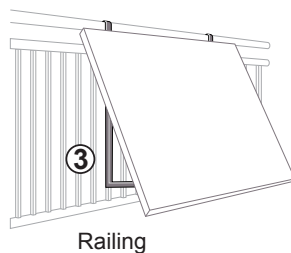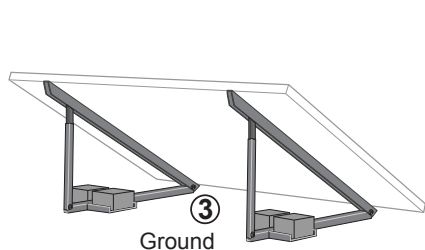


INSTALLATION - BALLAST FLAT ROOF BRACKET

STEP ① Connect parts with Bolts

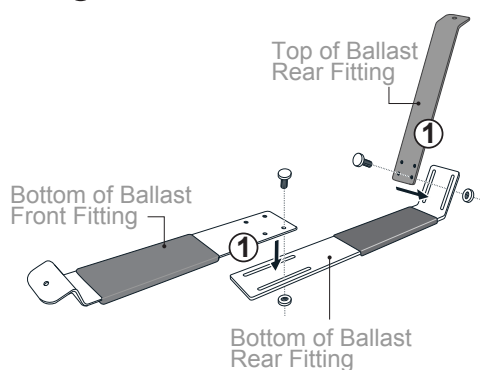

STEP ② Connect bottom and top edges of Panel to ends of Brackets

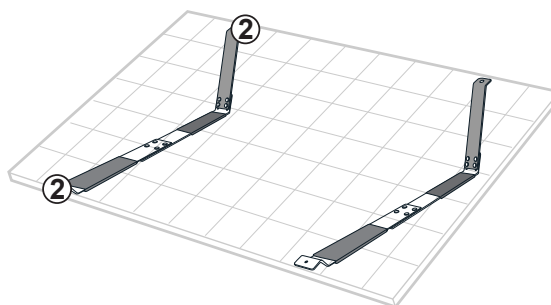

STEP ③ Secure the bracket feet with ballast weights for safety (not included).



You can register your kit at <https://myplugin.solar/> after installation, using ENA references:

• Bolt 460W System:
THUNE/21203/V1

• Bolt 920W System:
THUNE/21204/V1

• Bolt 530W System:
THUNE/21750/V1/A1